

SUMITUBE™ F (Z)

[105°C rating, flame-retarded heat-shrinkable tubing]
UL recognized

Catalog No. 939  RoHS directive 10 substances


 Waterproofing  Flame-retarded  UL recognized  CSA recognized



Basic Properties

- **Material** : Irradiated cross-linked flexible flame-retarded polyolefin
- **Shrink temperature** : min. 90°C
- **Shrink ratio** : Radial change: min. 50%
: Longitudinal change: min. -15%
- **Continuous operating temperature** : -55 to 105°C

Features


- UL recognized  Flexible
- Flame-retarded (PBDE/PBB-free)

Specifications/Approvals

UL224
File No. E48762 Catalog No. SUMITUBE™ F (Z) or 939
Rating temperature: 105°C Rating voltage: 600V
Flammability: VW-1

Electrical Appliance and Material Safety Law (Japan)
Flammability rating (-F-) test registration No.: F-ST53-009 - F-ST53-012


Marking on Surface

VW-1 -F-  SUMITOMO-K SUMITUBE F (Z) CAT 939 105°C

Applications

- Insulation, protection and reinforcement for termination and joints of electric wire
- Color identification and bundling for electric wires
- Insulation and protection of resistors and capacitors

Shrink Properties

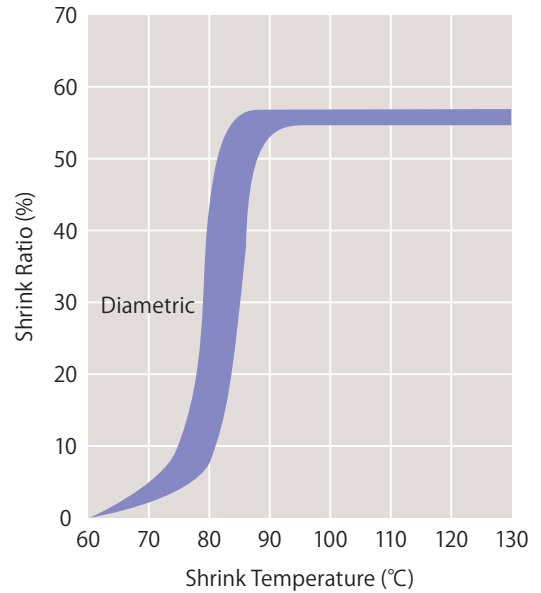

Colors

- Black, Brown, Red, Orange, Yellow, Green, Blue, Purple, Gray, White

Properties [UL224]

Properties	Items	Requirements	Typical values*1
Mechanical	Tensile strength (before aging)	min. 10.4MPa	12.6MPa
	Tensile strength (after aging)	136°C x 7 days, min. 7.3MPa	14.8MPa
	Elongation (before aging)	min. 200%	333%
	Elongation (after aging)	136°C x 7 days, min. 100%	358%
	Heat shock	180°C x 4 hours, no crack	Pass
Electrical	Cold bend	-30°C x 1 hour, no crack	Pass
	Dielectric withstand (before aging)	AC2.5kV x 60 sec., no breakdown	Pass
	Dielectric withstand (after aging)	136°C x 7 days, AC2.5kV x 60 sec., no breakdown	Pass
	Dielectric breakdown (before aging)	min. AC2.5kV	21.0kV
	Dielectric breakdown (after aging)	136°C x 7 days, min. 50% of original and min. AC2.5kV	Pass
Chemical	Volume resistivity	min. 1.0 x 10 ¹⁶ Ω·cm	2.7 x 10 ¹⁶ Ω·cm
	Corrosion against bare copper	136°C x 7 days, no corrosion after leaving under 95% humidity, 23°C x 24 hours	Pass
	Stability against copper	136°C x 7 days, elongation min. 100% after leaving under 95% humidity, 23°C x 24 hours	358%
	Flammability	Flame-retarded, pass VW-1	Pass

*1: For reference use only

Sizes

Trade size (mm)	After supplied (mm)		After recovered (mm)		Unit length (min.) (m)		Nominal size (mm)	As supplied (mm)		After recovered (mm)		Unit length (min.) (m)	
	Inside diameter	Wall thickness (nom.)	Inside diameter (max.)	Wall thickness (min.)	Cut	Spool		Inside diameter	Wall thickness (nom.)	Inside diameter (max.)	Wall thickness (min.)	Cut	Spool
1 × 0.2	1.30 ± 0.30	0.20	0.50	0.33	1	200	11 × 0.25	11.4 ± 0.4	0.25	5.50	0.56	1	50
1.5 × 0.2	2.00 ± 0.30	0.20	0.75	0.36	1	200	12 × 0.25	12.4 ± 0.4	0.25	6.0	0.56	1	50
2 × 0.2	2.50 ± 0.30	0.20	1.00	0.44	1	200	13 × 0.3	13.4 ± 0.4	0.30	6.5	0.69	1	50
2.5 × 0.25	3.00 ± 0.30	0.25	1.25	0.44	1	200	14 × 0.3	14.5 ± 0.4	0.30	7.0	0.69	1	50
3 × 0.25	3.50 ± 0.30	0.25	1.50	0.44	1	200	15 × 0.3	15.5 ± 0.4	0.30	7.5	0.69	1	50
3.5 × 0.25	4.00 ± 0.30	0.25	1.75	0.44	1	200	16 × 0.3	16.8 ± 0.5	0.30	8.0	0.69	1	50
4 × 0.25	4.50 ± 0.30	0.25	2.00	0.44	1	200	18 × 0.35	18.7 ± 0.5	0.35	9.0	0.77	1	50
5 × 0.25	5.40 ± 0.30	0.25	2.50	0.56	1	100	20 × 0.35	21.2 ± 0.6	0.35	10.0	0.77	1	50
6 × 0.25	6.4 ± 0.4	0.25	3.00	0.56	1	100	22 × 0.4	23.2 ± 0.6	0.40	11.0	0.77	1	50
7 × 0.25	7.4 ± 0.4	0.25	3.50	0.56	1	50	25 × 0.4	26.1 ± 0.8	0.40	12.5	0.87	1	50
8 × 0.25	8.4 ± 0.4	0.25	4.00	0.56	1	50	30 × 0.5	32.0 ± 1.0	0.50	15.0	0.87	1	50
9 × 0.25	9.4 ± 0.4	0.25	4.50	0.56	1	50	40 × 0.5	43.0 ± 1.5	0.50	20.0	0.97	1	50
10 × 0.25	10.4 ± 0.4	0.25	5.00	0.56	1	50	50 × 0.5	53.0 ± 2.0	0.50	25.0	0.97	1	50